

Datasheet

[Get a Quote](#)

Overview

Huawei S5720-32P-EI-AC supports twenty-four Ethernet 10/100/1000 ports and eight Gig SFP. There are two QSFP+ stack optical ports on the back panel.


Quick Specification

Model	S5720-32P-EI-AC
Part Number	02350BDY
Memory (RAM)	2 GB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Not supported
Weight with packaging [kg(lb)]	4.5 kg (9.92 lb)
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.9 mm (1.72 in. x 17.4 in. x 8.85 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 237.3 mm (1.72 in. x 17.4 in. x 9.34 in.)

Datasheet

Product Details:

Appearance:

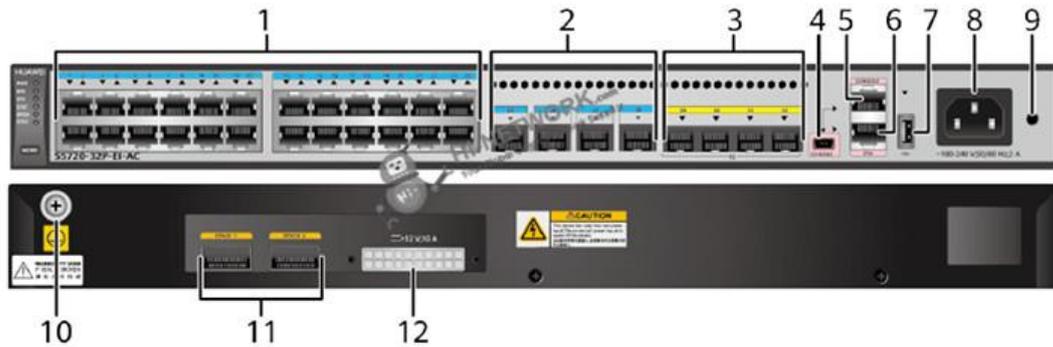

①	Twenty-four 10/100/1000BASE-T ports
②	Four 100/1000BASE-X ports
③	Four 1000BASE-X ports
④	One mini USB port
⑤	One console port
⑥	One ETH management port
⑦	One USB port
⑧	AC socket
⑨	Jack for AC power cable locking strap
⑩	Ground screw
⑪	Two QSFP+ stack optical ports
⑫	RPS socket

The Accessories for S5720-32P-EI-AC:

Recommended elements:

Model	Description
GE-SFP Optical Transceiver	
SFP-1000BaseT	Electrical Transceiver, SFP, GE, Electrical Interface Module(100m,RJ45)

Datasheet

eSFP-GE-SX-MM850	Optical Transceiver, eSFP, GE, Multi-mode Module(850nm,0.55km,LC)
SFP-GE-LX-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,10km,LC)
S-SFP-GE-LH40-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,40km,LC)
S-SFP-GE-LH40-SM1550	Optical Transceiver, eSFP, GE, Single-mode Module(1550nm,40km,LC)
40GE optical transceiver	
QSFP-40G-iSR4	40GBase-iSR4 Optical Transceiver, QSFP+, 40G, Multi-mode (850nm,0.15km,MPO) (Connect to four SFP+ Optical Transceiver)

Compare to Similar Items:

Models	S5720-36PC-EI-AC	S5720-32P-EI-AC
Downlink Ports	28 × Ethernet 10/100/1000 ports 4 of which are dual-purpose 10/100/1000 or SFP	24 x 10/100/1,000 Base-T Ethernet ports
Uplink Ports	4 × Gig SFP	4 x 100/1,000 Base-X SFP ports, and 4 x 1,000 Base-X SFP ports
Power Supply	AC Power Supply	AC Power Supply
Interface Slots	1	None

Get more information:

Do you have any question about the S5720-32P-EI-AC 02350BDY?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	02350BDY
Model	S5720-32P-EI-AC
Memory (RAM)	2 GB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	80.32 years
Mean time to repair (MTTR)	2
Availability	> 0.99999
Service port surge protection	Common mode: ±6 kV
Power supply surge protection	±6 kV in differential mode, ±6 kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.9 mm (1.72 in. x 17.4 in. x 8.85 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 237.3 mm (1.72 in. x 17.4 in. x 9.34 in.)

Datasheet

Weight (with packaging)	4.5 kg (9.92 lb)
Stack ports	Two fixed QSFP+ stack ports on the rear card
RTC	Supported
RPS	Supported
PoE	Not supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, full speed of fans)	50.7 W
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> • Tested according to ATIS standard • EEE enabled • No PoE power consumption 	39.75 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 49.3 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223