

## Datasheet

[Get a Quote](#)

## Overview

Huawei S5720-28P-SI-AC supports twenty-four Ethernet 10/100/1000 ports, four of which are dual-purpose 10/100/1000 or SFP, and 4 x Gig SFP. It offers double hot-swappable AC/DC power supplies, one AC power module is configured by default.


## Quick Specification

Model	S5720-28P-SI-AC
Part Number	02350DLS
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the <b>display version</b> command.
PoE	Not supported
Weight with packaging [kg(lb)]	9.1 kg (20.06 lb)
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 424.7 mm (1.75 in. x 17.4 in. x 16.72 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 451.8 mm (1.75 in. x 17.4 in. x 17.79 in.)</p>

## Datasheet

### Product Details:

#### Appearance:

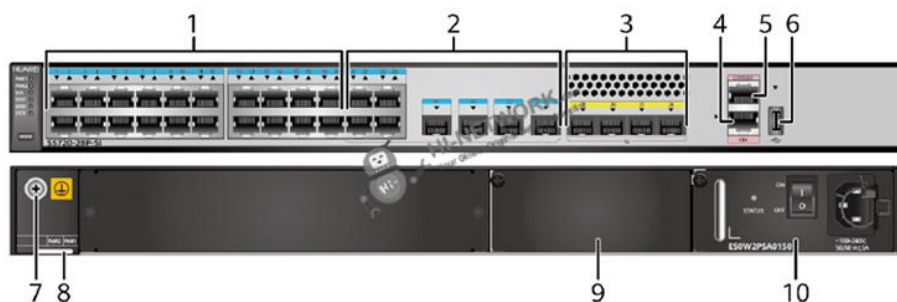

①	Twenty 10/100/1000BASE-T ports
②	Four combo ports (10/100/1000BASE-T + 100/1000BASE-X)
③	Four 1000BASE-X ports
④	One ETH management port
⑤	One console port
⑥	One USB port
⑦	Ground screw
⑧	ESN label
⑨	Power module slot 2
⑩	Power module slot 1

Get more information:

Do you have any question about the S5720-28P-SI-AC 02350DLS?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

### Specific Data Sheet:

Part Number	02350DLS
Model	S5720-28P-SI-AC
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the <b>display version</b> command.
Mean time between failures (MTBF)	85.48 years
Mean time to repair (MTTR)	2



## Datasheet

Availability	> 0.99999
Service port surge protection	Common mode: $\pm 6$ kV
Power supply surge protection	Using AC power modules: $\pm 6$ kV in differential mode, $\pm 6$ kV in common mode Using DC power modules: $\pm 1$ kV in differential mode, $\pm 2$ kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 424.7 mm (1.75 in. x 17.4 in. x 16.72 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 451.8 mm (1.75 in. x 17.4 in. x 17.79 in.)
Weight (with packaging)	9.1 kg (20.06 lb)
Stack ports	GE electrical ports and GE SFP optical ports except combo ports on the front panel
RTC	Supported
RPS	Supported
PoE	Not supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, full speed of fans)	27.9 W
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> <li>Tested according to ATIS standard</li> <li>EEE enabled</li> <li>No PoE power consumption</li> </ul>	19.6 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature	-5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	Noise-free (no fans)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification



S5720-28P-SI-AC (02350DLS)



## Datasheet

### Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

### Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: [echo.hinetwork](#)

WhatsApp Business: +8618057156223

