

[Get a Quote](#)

## Overview

The Cisco 1941 Router, modular router, is designed for branch offices.

## Quick Specification

Table 1 shows the Quick Specs of the CISCO1941/K9.

Product Code	CISCO1941/K9
Dimensions	34.3 cm x 29.2 cm x 8.9 cm
Package Weight	10.48 Kg
Rack Units	2 RU
Interfaces	2 integrated 10/100/1000 Ethernet ports: GE0/0&GE0/1
Expansion Slot(s)	2 enhanced High-Speed WAN Interface Card slots 1 Internal Services Module slot
DRAM Memory	512 MB (installed) / 2 GB (max)
Flash Memory	256 MB (installed) / 8 GB (max)
Compliant Standards	IEEE 802.3ah, IEEE 802.1ah, IEEE 802.1ag
Power	AC 120/230 V (50/60 Hz)
Compliant Standards	IEEE 802.3ah, IEEE 802.1ah, IEEE 802.1ag
AC Input Voltage	100-240 V ~
AC Input Frequency	47-63 Hz

Figure 1 shows the front view of Cisco Router 1941/K9.



## Product Details


Figure 2 shows the status LEDs, on the front panel of the 1941/K9, including three statuses: SYS, ACT and PoE.



Table 2 shows the front panel LEDs area description.

LED	Color	Description
SYS	Solid green	Solid green indicates normal operation.
	Blinking green	System is booting or is in ROM monitor mode.
	Amber	System error.
	Off	Power is off or system board is faulty.
ACT	Green	Solid or blinking when any packets are transmitted or received on any WAN or LAN, or when monitoring system activity.
PoE	Green	PoE is available.
	Amber	Power supply is not supplying PoE power.

Figure 3 shows the back panel of this router with LEDs.

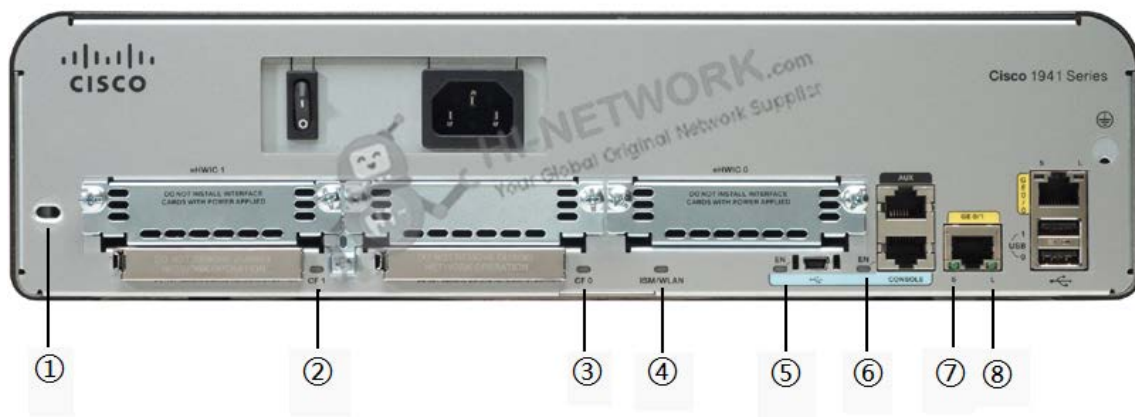


Note:

(1)	Kensington security slot	(5)	EN (Enable USB console)
(2)	CF 1	(6)	EN (Enable RJ-45 console)
(3)	CF 0	(7)	S (Speed)
(4)	ISM or WLAN	(8)	L (Link)

Table 3 shows the back panel LEDs area description.

LED	Color	Description	Location
CF 1	Green	Flash memory is busy.	Back Panel
	Amber	Initialized with error.	
	Blinking Green then turns off	CompactFlash is ready for removal.	
CF 0	Green	Flash memory is busy.	Back Panel
	Amber	Initialized with error.	
	Blinking Green then turns off	CompactFlash is ready for removal.	
S (Speed)	1 blink + pause	GE port operating at 10 Mb/s.	Back Panel
	2 blink + pause	GE port operating at 100 Mb/s.	
	3 blink + pause	GE port operating at 1000 Mb/s.	
L (Link)	Green	GE link is established.	Back Panel
	Off	No GE link is established.	
EN (RJ-45 console port)	Green	The RJ-45 console port is active.	Back Panel
EN (USB serial console port)	Green	The USB console port is active.	Back Panel

Figure 4 shows the ports and slots on the back panel of Cisco 1941/K9.

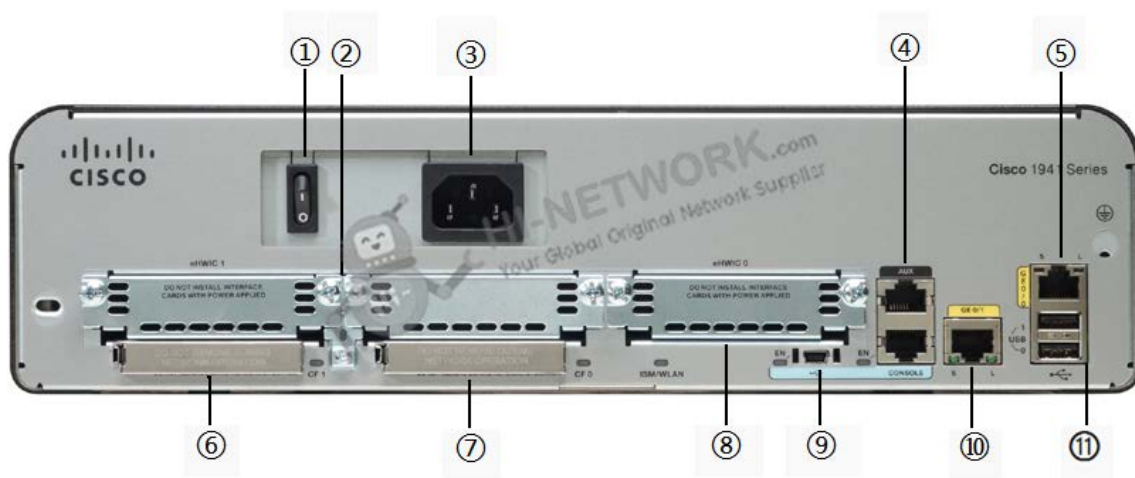

1

Note:

(1)	On/Off switch	(7)	Compact flash 2
(2)	HWIC slot 1	(8)	HWIC slot 2

(3)	Input power connector	(9)	USB serial port
(4)	AUX port	(10)	GE 0/1
(5)	GE 0/0	(11)	USB ports
(6)	Compact flash 1		

- Cisco 1941/K9 supports 2 integrated EHWIC slots for flexible configurations. It supports two modules: 1 double wide HWIC-D or single wide EHWIC/HWIC module or a 2nd single wide E-HIC/HWIC module.
- 2 high-speed USB 2.0 ports enable another mechanism secure token capabilities and storage.
- The 1941 has 2 external Compact Flash slots supporting to extend up to 8GB.

## Modularity Features

The Cisco 1941 provides significantly enhanced modular capabilities offering investment protection for customers.

Table 4 shows interfaces and modules for this router.

Models	Description
ISM-SRE-300-K9	Internal Services Module (ISM) with Services Ready Engine
<a href="#">MEM-CF-256U1GB</a>	256MB to 1GB Compact Flash Upgrade for Cisco 1900,2900,3900
<a href="#">MEM-CF-256U2GB</a>	256MB to 2GB Compact Flash Upgrade for Cisco 1900,2900,3900
<a href="#">MEM-CF-256U512MB</a>	256MB to 512MB CF Upgrade for Cisco 1900,2900,3900 ISR
<a href="#">MEM-CF-256U4GB</a>	256MB to 4GB Compact Flash Upgrade for Cisco 1900,2900,3900
<a href="#">EHWIC-1GE-SFP-CU</a>	Cisco 1900, 2900, 3900 Router EHWIC WAN Card EHWIC-1GE-SFP-CU
<a href="#">EHWIC-4ESG</a>	Four port 10/100/1000 Base-TX Gigabit Ethernet switch interface card for Cisco 1900 2900 3900 Routers
<a href="#">HWIC-2FE</a>	HWIC two routed port Cisco Router High-Speed WAN Interface card
<a href="#">HWIC-1T</a>	1-Port Serial WAN Interface Card Cisco Router High-Speed WAN Interface card
<a href="#">HWIC-2T</a>	2-Port Serial WAN Interface Card Cisco Router High-Speed WAN Interface card
<a href="#">VWIC3-1MFT-T1/E1</a>	Cisco Voice/WAN Card VWIC3-1MFT-T1/E1
<a href="#">VWIC3-2MFT-T1/E1</a>	Cisco Voice/WAN Card VWIC3-2MFT-T1/E1
<a href="#">VWIC3-1MFT-G703</a>	Cisco Voice&WAN T1/E1 interface module VWIC3-1MFT-G703
<a href="#">VWIC3-2MFT-G703</a>	Cisco Voice/WAN Card VWIC3-2MFT-G703

## The Licenses

The Cisco 1941/K9 router supports IOS Technology Package Licenses.

Table 5 shows the models of these licenses.

Licenses	Description

L-SL-19-DATA-K9	Cisco 1900 IOS License L-SL-19-DATA-K9= Data E-Delivery PAK for Cisco 1900
L-SL-19-SEC-K9	Security License for Cisco 1900
L-SL-19-APP-K9	AppX License with; DATA and WAAS for Cisco 1900 Series

## Compare to Similar Routers

Table 6 shows the comparison between Cisco 1921 router and 1941 router.

Model	<a href="#">CISCO1921/K9</a>	CISCO1941/K9
Interface	w/2 GE	2 GE
EHWIC slot	2	2
ISM Slot	0	1
Memory	512 MB (installed) / 512 MB (max)	512 MB (installed) / 2 GB (max)
Flash Memory	256 MB (installed) / 256 MB (max)	256 MB (installed) / 8 GB (max)
Rack Unit	1U	2U

## Get More Information

Do you have any question about the Cisco1941/K9 router?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).

## Specification

CISCO1941/K9 Specification	
Main Specs	
Manufacturer	Cisco Systems, Inc
Manufacturer Part Number	CISCO1941/K9
Product Type	Router
Form Factor	External - modular - 2U
Dimensions (WxDxH)	34.3 cm x 29.2 cm x 8.9 cm
Weight	5.8 kg
DRAM Memory	512 MB (installed) / 2 GB (max)
Flash Memory	256 MB (installed) / 8 GB (max)
Routing Protocol	OSPF, IS-IS, BGP, EIGRP, DVMRP, PIM-SM, IGMPv3, GRE, PIM-SSM, static IPv4 routing, static IPv6 routing

Data Link Protocol	Ethernet, Fast Ethernet, Gigabit Ethernet
Network / Transport Protocol	IPsec
Remote Management Protocol	SNMP, RMON
Features	Cisco IOS IP Base, firewall protection, VPN support, MPLS support, Syslog support, IPv6 support, Class- Based Weighted Fair Queuing (CBWFQ), Weighted Random Early Detection (WRED)
Compliant Standards	IEEE 802.3ah, IEEE 802.1ah, IEEE 802.1ag
Power	AC 120/230 V (50/60 Hz)
<b>Services and Slot Density</b>	
Embedded hardware-based crypto acceleration (IPsec + SSL)	Yes
Total Onboard LAN 10/100/1000	2
RJ-45-Based Ports	2
SFP-Based Ports	0
SM Slots	0
Double-Wide SM Slots	0
EHWIC Slots	2
Double-Wide EHWIC slots (use of a double-wide EHWIC slot will consume two EHWIC slots)	1
ISM Slots	1 (0 on the Cisco 1941W)
Memory (DDR2 ECC DRAM) - Maximum	512 MB 2.0 GB
Compact Flash (external) - Default	slot 0: 256 MB slot 1: none
Compact Flash (external) - Maximum	slot 0: 4 GB slot 1: 4 GB
External USB flash memory slots (Type A)	2
USB Console Port (Type B) (up to 115.2 kbps)	1
Serial Console Port (up to 115.2 kbps)	1
Serial Auxiliary Port (up to 115.2 kbps)	1
Power Supply Options	AC, POE
Redundant Power Supply Support	No
<b>Power Specifications</b>	
AC Input Voltage	100-240 V ~
AC Input Frequency	47-63 Hz
AC Input Current range AC Power Supply (Max) (Amps)	1.5-0.6
AC Input Surge Current	<50 A
Typical Power (No Modules)	35 W
Maximum Power capacity with AC power supply	110 W

Maximum Power capacity with PoE power supply (platform only)	110 W
Maximum PoE device power capacity with PoE power supply	80 W
<b>Physical Specifications</b>	
Dimensions (H x W x D)	3.5 in x 13.5 in x 11.5 in (34.3 cm x 29.2 cm x 8.9 cm)
Rack Height	2 RU
Rack-mount 19in. (48.3 cm) EIA	Included
Wall-mount (refer to installation guide for approved orientation)	Yes
Package Weight	23.1 lbs (10.48 Kg)
Weight-with AC power supply (no modules)	12 lbs(5.44 Kg)
Weight-with POE power supply (no modules)	12.8 lbs (5.8 Kg)
Maximum Weight-Fully Configured	14 lbs (6.35 Kg)
Airflow	Front to Side
<b>Environmental Specifications</b>	
<b>Operating Condition</b>	
Temperature-5906 feet (1800 m) max. altitude	0-40°C (32-104°F)
Temperature-9843 feet (3000 m) max. altitude	0-25°C (32-77°F)
Altitude	3000 m (10000 ft)
Humidity	10 to 85% RH
Acoustic: Sound Pressure (Typ/Max)	26/46 dBA
Acoustic: Sound Power (Typ/Max)	36/55 dBA
<b>Transportation/Storage Condition</b>	
Temperature	-40 - 70 oC (-40 - 158 oF)
Humidity	5 to 95%RH
Altitude	4570m (15000 ft)
<b>Regulatory Compliance</b>	
Safety	UL 60950-1 CAN/CSA C22.2 No. 60950-1 EN 60950-1 AS/NZS 60950-1 IEC 60950-1
EMC	47 CFR, Part 15 ICES-003 Class A EN55022 Class A CISPR22 Class A AS/NZS 3548 Class A VCCI V-3 CNS 13438 EN 300-386 EN 61000 (Immunity) EN 55024, CISPR 24 EN50082-1
Telecom	TIA/EIA/IS-968 CS-03 ANSI T1.101 ITU-T G.823, G.824 IEEE 802.3 RTTE Directive

## Want to Buy

---

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

---

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223