

Overview

The NetEngine AR6000 series routers provide a broad range of options for customers of all sizes across industries to best suit their extensive application scenarios. The NetEngine AR6100 series is ideal for midsize branches.

Quick Specification

Table 1 shows the quick specification.

Model	AR6120-S
Part Number	02352VEK
Description	AR6120-S AC host, 5*GE RJ45, 4*GE SFP, 1*USB 3.0, 4*SIC
Dimensions (H x W x D)	150 mm x 525 mm x 388 mm (5.91 in. x 20.67 in. x 15.28 in.)
Weight	4.7 kg (10.3 lb)
Typical power consumption [W]	17 W
Maximum power consumption [W]	20 W


Figure 1 shows the appearance of AR6120-S.





Product Details

Figure 2 shows the structure of AR6120-S.

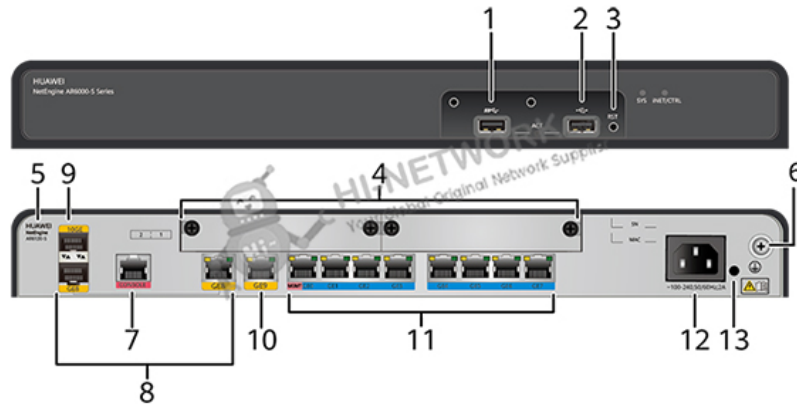

Note:

(1)	USB interface 3.0 (host)	(8)	WAN interface: GE combo interface
(2)	USB interface 2.0 (host)	(9)	WAN interface: one 10GE optical interface
(3)	RST button	(10)	WAN interface: one GE electrical interface
(4)	Two SIC slots	(11)	LAN interfaces: eight GE electrical interfaces
(5)	Product model silkscreen	(12)	AC power jack
(6)	Ground point	(13)	Jack for power cable locking strap
(7)	Console interface		

Get More Information

Do you have any question about the AR6120-S (02352VEK)?

Contact us now via info@hi-network.com.

Specification

AR6120-S Datasheet	
Model	AR6120-S
Part Number	02352VEK
Description	AR6120-S, 1*GE WAN, 1*GE combo WAN, 1*10GE SFP+, 8*GE LAN, 2*USB, 2*SIC
Installation type	Rack Work bench Against the wall





Chassis height [U]	1 U
Dimensions without packaging (H x W x D) [mm(in.)]	Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 390.0 mm x 229.8 mm (1.75 in. x 15.35 in. x 9.05 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 390.0 mm x 234.6 mm (1.75 in. x 15.35 in. x 9.24 in.)
Dimensions with packaging (H x W x D) [mm(in.)]	150 mm x 525 mm x 388 mm (5.91 in. x 20.67 in. x 15.28 in.)
Weight with packaging [kg(lb)]	4.7 kg (10.3 lb)
Weight without packaging [kg(lb)]	2.9 kg (6.39 lb)
CPU	1.4 GHz, 4 Cores
Memory	2 GB
NAND Flash	512 MB
Console port	RJ45
RTC	Supported
LAN ports	8 x GE electrical
WAN ports	1 x 10GE SFP+, 1 x GE electrical, 1 x GE combo
Number of service board slots	2
MIC slots (default/maximum)	0/0
SIC slots (default/maximum)	2/2
WSIC slots (default/maximum)	0/1
XSIC slots (default/maximum)	0/0
Redundant MPUs	Not supported
RPS input	Not supported
PoE	Not supported
IP rating	IP20
MTBF [years]	36.7 years
MTTR [hours]	2 hours
Availability	0.9999937802
Typical power consumption [W]	17 W
Maximum power consumption [W]	20 W
Power supply mode	AC built-in
Number of power modules	1
Rated input voltage [V]	100 V to 240 V, 50 Hz/60 Hz
Input voltage range [V]	90 V to 264 V, 47 Hz to 63 Hz
Maximum input current [A]	2 A
Maximum output power [W]	60 W





Redundant power supply	Not supported
------------------------	---------------

Want to Buy

[Get a Quote](#)



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](#)

WhatsApp Business: +8618057156223

