

Overview

Offering high-performance, high port density, and low latency, CloudEngine 6800 series switches enable enterprises and carriers alike to build cloud-oriented data center networks. The series features an advanced hardware design combined with either 10 GE, 25 GE, or 50 GE access ports, and 40 GE, 100 GE, or 200 GE uplink ports. Advanced data center features, high-performance stacking technologies, and flexible airflow capabilities complete the series. CloudEngine 6800 is well-suited to both the core and aggregation layers, and is fully compatible with CloudEngine 16800 and 12800 series switches, enabling enterprises to build scalable, simplified, open, and secure networks.

Quick Specification

Table 1 shows the quick specification.

Model	CE6880-24S4Q2CQ-EI
Part Number	02350SRC
Description	CE6880-24S4Q2CQ-EI Switch (24-Port 10GE SFP+, 4-Port 40GE QSFP+, 2-Port 100GE QSFP28, Without Fan and Power Module)
Memory	2 GB
Flash memory	1 GB
Static power consumption [W]	120 W
Static heat dissipation [BTU/hour]	409 BTU/hr


Figure 1 shows the appearance of CE6880-24S4Q2CQ-EI.





Product Details

Figure 2 shows the structure of CE6880-24S4Q2CQ-EI.

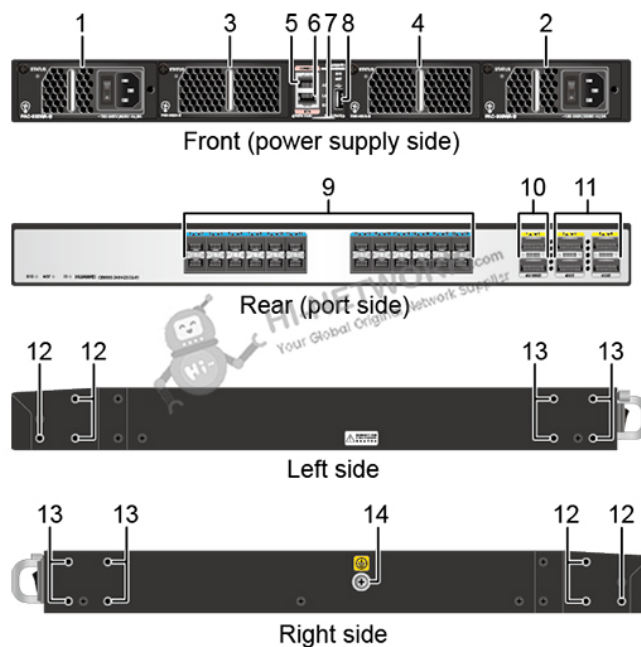

Note:

(1)	Power supply slot 1	(8)	USB port
(2)	Power supply slot 2	(9)	Twenty-four 10GE SFP+ Ethernet optical ports
(3)	Fan slot 1	(10)	Two 40GE/100GE QSFP28 Ethernet optical ports
(4)	Fan slot 2	(11)	Four 40GE QSFP+ Ethernet optical ports
(5)	Console port	(12)	Three port-side mounting holes for mounting brackets
(6)	ETH management port (RJ45)	(13)	Four power-supply-side mounting holes for mounting brackets
(7)	Barcode label	(14)	Ground screw

Get More Information

Do you have any question about the CE6880-24S4Q2CQ-EI (02354LHX, 02354LHX-001)?

Contact us now via info@hi-network.com.





Specification

CE6880-24S4Q2CQ-EI Datasheet	
Model	CE6880-24S4Q2CQ-EI
Part Number	02350SRC
Description	CE6880-24S4Q2CQ-EI Switch (24-Port 10GE SFP+, 4-Port 40GE QSFP+, 2-Port 100GE QSFP28, Without Fan and Power Module)
Dimensions (W x D x H)	442.0 mm x 420.0 mm x 43.6 mm (17.4 in. x 16.5 in. x 1.72 in.)
Weight (with two power modules and two fan modules, calculated based on the heaviest model if multiple models are supported)	8.5 kg (18.74 lb)
Operating temperature	0°C to 40°C (32°F to 104°F) at altitude of 0-1800 m (0-5906 ft.) NOTE: When the altitude is 1800-5000 m (5096-16404 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.).
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Relative humidity	5% RH to 95% RH, noncondensing
Altitude	< 5000 m (16404 ft.)
Noise (sound pressure, 27°C)	Back-to-front airflow: < 52 dBA Front-to-back airflow: < 52 dBA
Power source type	AC/DC
AC power input	Rated input voltage range: 100 V AC to 240 V AC, 50/60 Hz Maximum input voltage range: 90 V AC to 290 V AC, 47 Hz to 63 Hz
DC power input	Rated voltage range: -48 V DC to -60 V DC Maximum voltage range: -38.4 V DC to -72 V DC
High-voltage DC power input	Not supported
Rated input current	350 W DC power (PDC-350WA series): 11 A (-48 V DC to -60 V DC) 600 W AC power (PAC-600WA series): 9 A (100 V AC to 240 V AC)
Maximum power consumption	224 W
Typical power consumption	120 W (100% throughput, SFP+ cables on 24 ports and QSFP+ cables on 6 ports, double power modules)
Maximum heat dissipation	765 BTU/hr
Typical heat dissipation	409 BTU/hr (100% throughput, SFP+ cables on 24 ports and QSFP+ cables on 6 ports, double power modules)
Power module	AC: 6 kV in common mode and 6 kV in differential mode DC: 4 kV in common mode and 2 kV in differential mode
Heat dissipation mode	Air cooling
Airflow	Front-to-back or back-to-front, depending on the fan modules and power modules





Power module backup	1+1 backup
Fan module backup	1+1 backup not supported NOTE: A CE6800 chassis uses two fan modules, with each fan module containing two fans. The four fans in the chassis work in 3+1 backup mode.
Hot swap	Supported by all power modules and fan modules
Mean time between failures (MTBF)	61.41 years
Mean time to repair (MTTR)	1.78 hours
Availability	0.99999668259
Processor	1.5 GHz, eight-core.
DRAM Memory	2 GB
NOR Flash	32 MB
NAND Flash	1 GB
Service port supporting the stack function	10GE optical ports, 40GE optical ports, and 100GE optical ports
Hot swap	Supported by all power modules and fan modules
Mean time between failures (MTBF)	61.41 years
Mean time to repair (MTTR)	1.78 hours
Availability	0.99999668259
Processor	1.5 GHz, eight-core.
DRAM Memory	2 GB
NOR Flash	32 MB
NAND Flash	1 GB
Service port supporting the stack function	10GE optical ports, 40GE optical ports, and 100GE optical ports
Certification	Safety standards compliance EMC standards compliance Environmental standards compliance

Want to Buy

Get a Quote



CE6880-24S4Q2CQ-EI (02350SRC)

Datasheet

[Get a Quote](#)



HI-NETWORK.com
Your Global Original Network Supplier

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

Buy Huawei, Cisco, Zte, Hpe, Dell, Fortinet Network Equipment
Online In China At Low Price! www.hi-network.com



HI-NETWORK.com
Your Global Original Network Supplier